





K3800 /3850 series Installation Dimensions & Tech Data

Length calculation

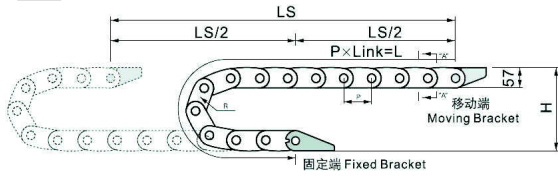


$$L = \frac{LS}{2} + \pi \times R + 224$$



L: Length
R: bending Radius
H: Installation Height
P: Pitch
224: Safety Length

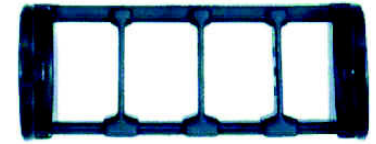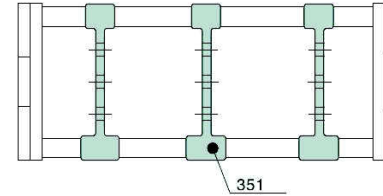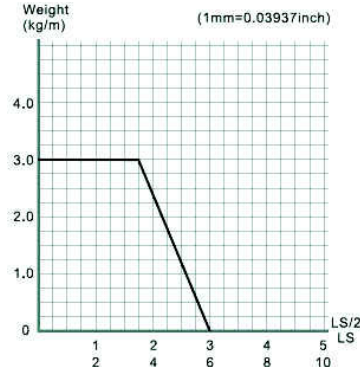

Moving bracket


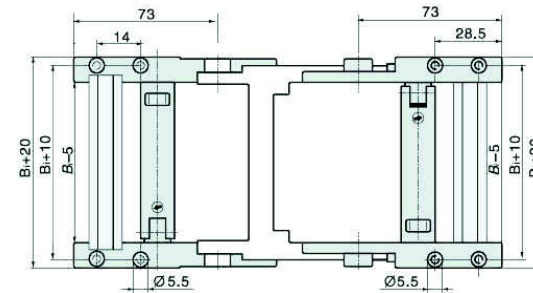


Fixed bracket

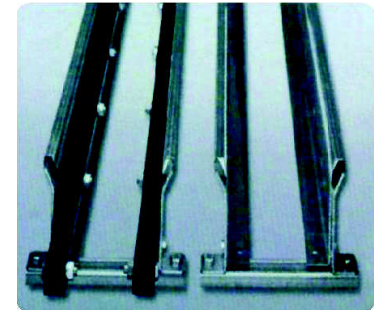




K3800 series can be open by both side

Type	Inner width (mm)	Outer width (mm)	Bending radius(mm)	Pitch (mm)
3800.050.□.0	50	77	75 100 125 150 200	45
3800.075.□.0	75	102	75 100 125 150 200	45
3800.100.□.0	100	127	75 100 125 150 200	45
3800.125.□.0	125	152	75 100 125 150 200	45
3800.150.□.0	150	177	75 100 125 150 200	45
3800.175.□.0	175	202	75 100 125 150 200	45
3800.200.□.0	200	227	75 100 125 150 200	45
3800.250.□.0	250	277	75 100 125 150 200	45



K3850 series can be open by both side

Type	Inner width (mm)	Outer width (mm)	Bending radius(mm)	Pitch (mm)
3850.050.□.0	50	77	75 100 125 150 200	45
3850.075.□.0	75	102	75 100 125 150 200	45
3850.100.□.0	100	127	75 100 125 150 200	45
3850.125.□.0	125	152	75 100 125 150 200	45

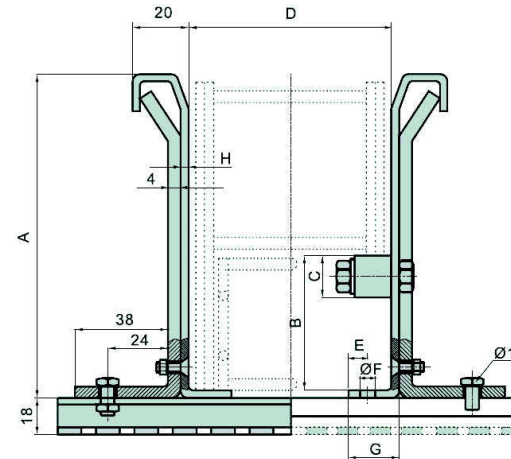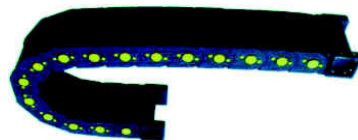

Cable tray without slide strip	3
Cable tray with slide strip	3
A	130
B	64
C	30
D	*
E	15
F	9
G	35
H	2