





K4500 /4550 series Installation Dimensions & Tech Data

Length calculation

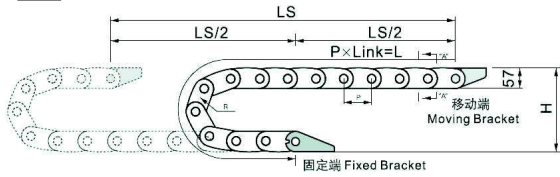


$$L = \frac{LS}{2} + \pi \times R + 268$$


L: Length
 R: bending Radius
 H: Installation Height
 P: Pitch
 268: Safety Length

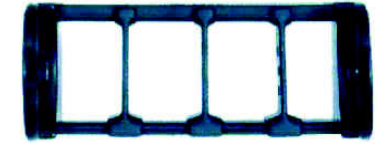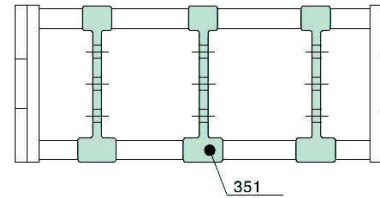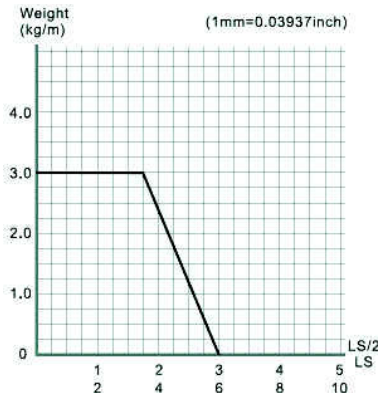

Fixed bracket


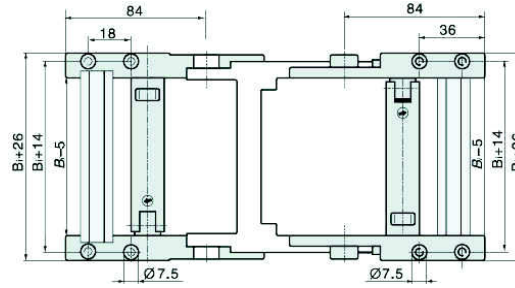


Moving bracket






K4500 series can be open by both side

Type	Inner width (mm)	Outer width (mm)	Bending radius(mm)	Pitch (mm)
4500.050.□.0	50	77	100 125 150 200	67
4500.075.□.0	75	102	100 125 150 200	67
4500.100.□.0	100	127	100 125 150 200	67
4500.125.□.0	125	152	100 125 150 200	67
4500.150.□.0	150	177	100 125 150 200	67
4500.175.□.0	175	202	100 125 150 200	67
4500.200.□.0	200	227	100 125 150 200	67
4500.250.□.0	250	277	100 125 150 200	67



K4550 series can be open by both side

Type	Inner width (mm)	Outer width (mm)	Bending radius(mm)	Pitch (mm)
4550.075.□.0	75	102	100 125 150 200	67
4550.100.□.0	100	127	100 125 150 200	67
4550.125.□.0	125	152	100 125 150 200	67

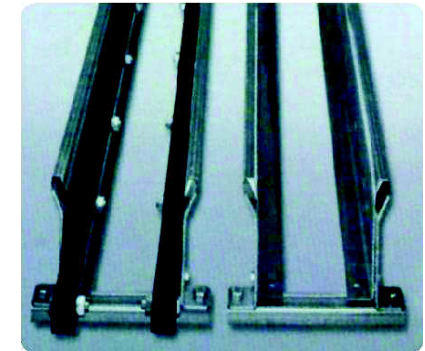

Cable tray without slide strip	3
Cable tray with slide strip	3
A	130
B	64
C	30
D	*
E	15
F	9
G	35
H	2

