





K3800 /3850 series Installation Dimensions & Tech Data

Length calculation

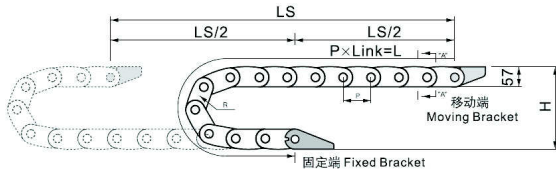


$$L = \frac{LS}{2} + \pi \times R + 224$$


L: Length
 R: bending Radius
 H: Installation Height
 P: Pitch
 224: Safety Length

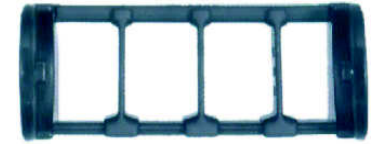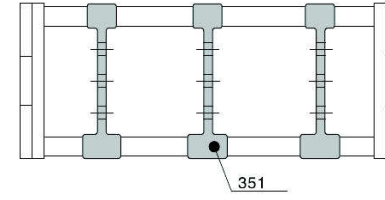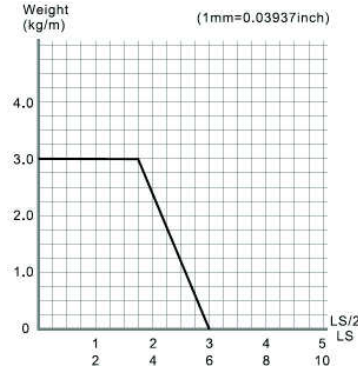

Moving bracket


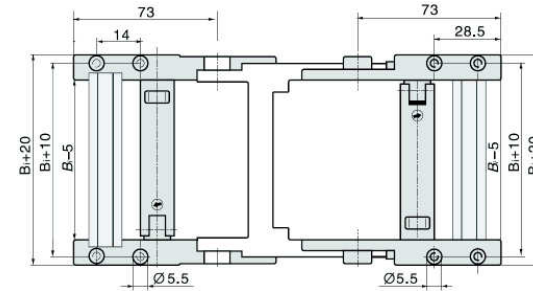


Fixed bracket






K3800 series can be open by both side

Type	Inner width (mm)	Outer width (mm)	Bending radius(mm)	Pitch (mm)	Weight (kg)
3800.050.□.0	50	77	75 100 125 150 200	56	2.20
3800.075.□.0	75	102	75 100 125 150 200	56	2.40
3800.100.□.0	100	127	75 100 125 150 200	56	2.60
3800.125.□.0	125	152	75 100 125 150 200	56	2.70
3800.150.□.0	150	177	75 100 125 150 200	56	2.90
3800.175.□.0	175	202	75 100 125 150 200	56	3.00
3800.200.□.0	200	227	75 100 125 150 200	56	3.10
3800.250.□.0	250	277	75 100 125 150 200	56	3.20



K3850 series can be open by both side

Type	Inner width (mm)	Outer width (mm)	Bending radius(mm)	Pitch (mm)	Weight (kg)
3850.050.□.0	50	77	75 100 125 150 200	56	2.40
3850.075.□.0	75	102	75 100 125 150 200	56	2.60
3850.100.□.0	100	127	75 100 125 150 200	56	2.80
3850.125.□.0	125	152	75 100 125 150 200	56	3.00

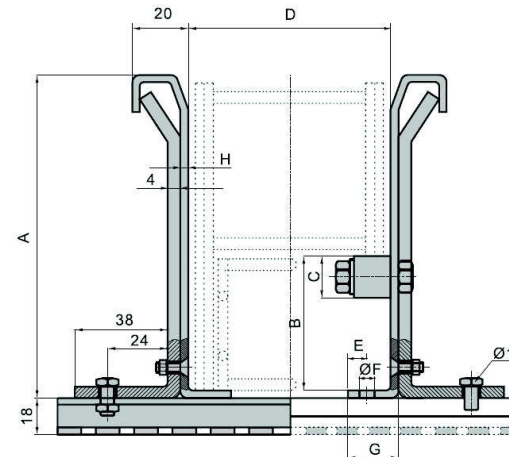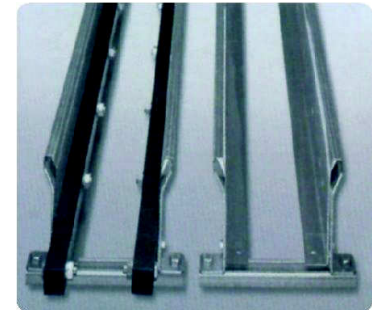

Cable tray without slide strip	3
Cable tray with slide strip	3
A	130
B	64
C	30
D	*
E	15
F	9
G	35
H	2