





K2500 /2550 series Installation Dimensions & Tech Data

Length calculation

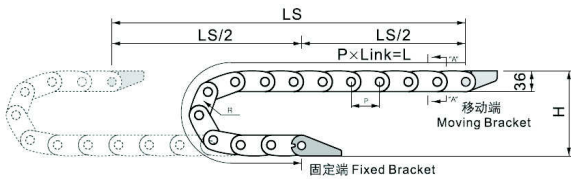


$$L = \frac{LS}{2} + \pi \times R + 180$$


L: Length
 R: bending Radius
 H: Installation Height
 P: Pitch
 180: Safety Length

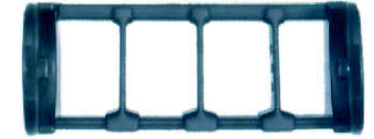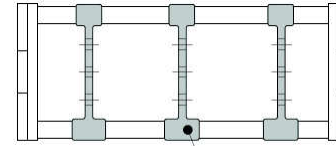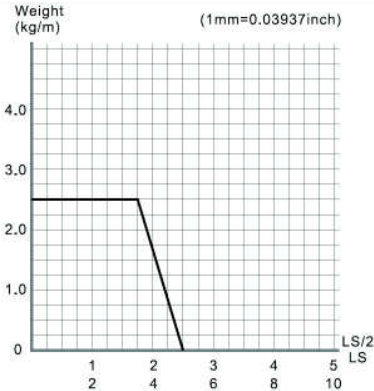

Fixed bracket

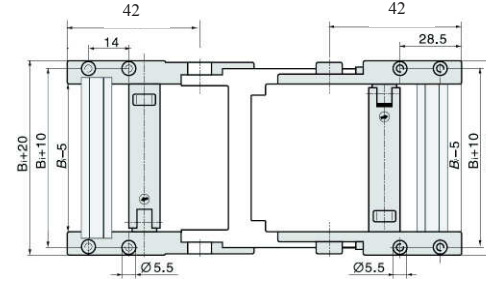


Moving bracket

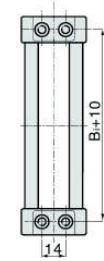




K2500 series can be open by both side

Type	Inner width (mm)	Outer width (mm)	Bending radius(mm)	Pitch (mm)	Weight (kg)
2500.038.□.0	38	55	55 75 100 125	47	1.05
2500.057.□.0	57	74	55 75 100 125	47	1.15
2500.077.□.0	77	94	55 75 100 125	47	1.30
2500.103.□.0	103	120	55 75 100 125	47	1.40



K2550 series can be open by both side


Type	Inner width (mm)	Outer width (mm)	Bending radius(mm)	Pitch (mm)	Weight (kg)
2550.038.□.0	38	55	55 75 100 125	47	1.15
2550.057.□.0	57	74	55 75 100 125	47	1.25
2550.077.□.0	77	94	55 75 100 125	47	1.40

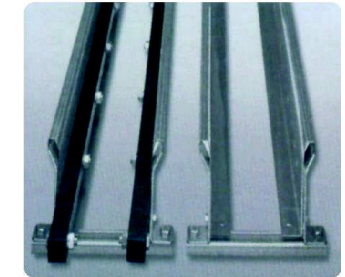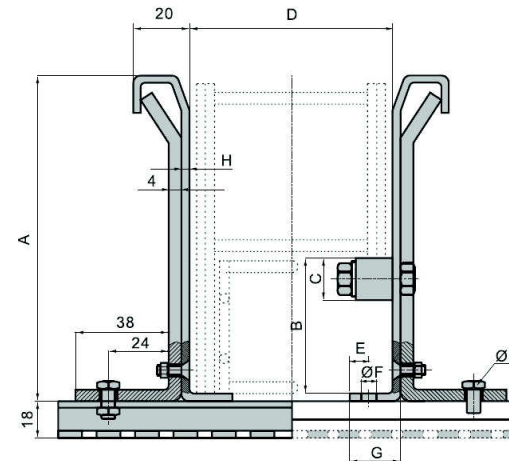

Cable tray without slide strip	1
Cable tray with slide strip	2
A	70
B	34
C	20
D	*
E	12
F	9
G	26
H	2



K3500/3550 series Installation Dimensions & Tech Data

Length calculation


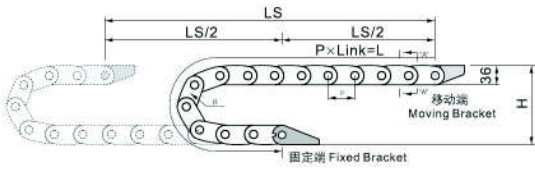


$$L = \frac{LS}{2} + \pi \times R + 224$$


L: Length
 R: bending Radius
 H: Installation Height
 P: Pitch
 224: Safety Length

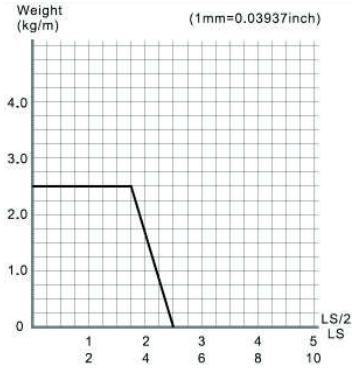

Fixed bracket

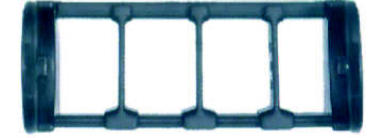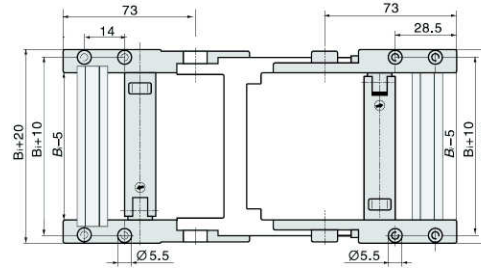


Moving bracket






K3500 series can be open by both side

Type	Inner width (mm)	Outer width (mm)	Bending radius(mm)	Pitch (mm)	Weight (kg)
3500.050.□.0	50	75	75 100 125 150 200	56	2.20
3500.075.□.0	75	100	75 100 125 150 200	56	2.50
3500.100.□.0	100	125	75 100 125 150 200	56	2.60
3500.125.□.0	125	150	75 100 125 150 200	56	2.70
3500.150.□.0	150	175	75 100 125 150 200	56	2.90
3500.175.□.0	175	200	75 100 125 150 200	56	3.00
3500.200.□.0	200	225	75 100 125 150 200	56	3.10
3500.250.□.0	250	275	75 100 125 150 200	56	3.20



K3550 series can be open by both side


Type	Inner width (mm)	Outer width (mm)	Bending radius(mm)	Pitch (mm)	Weight (kg)
3550.050.□.0	50	75	75 100 125 150 200	56	2.40
3550.075.□.0	75	100	75 100 125 150 200	56	2.70
3550.100.□.0	100	125	75 100 125 150 200	56	2.90
3550.125.□.0	125	150	75 100 125 150 200	56	3.00

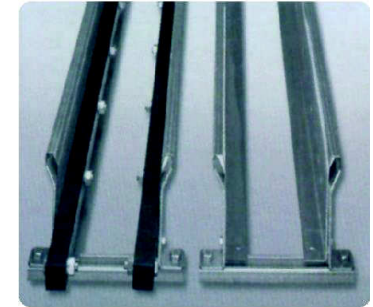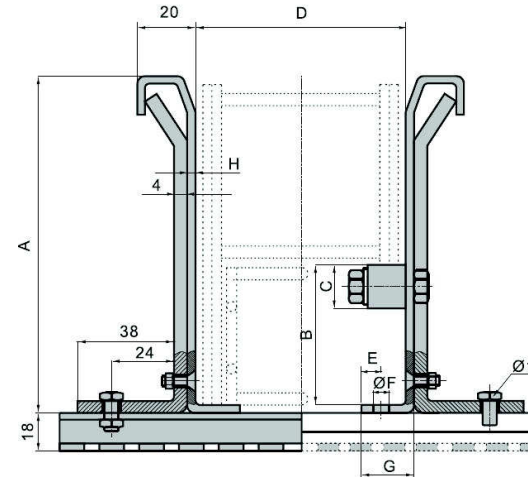

Cable tray without slide strip	1
Cable tray with slide strip	2
A	70
B	34
C	20
D	*
E	12
F	9
G	26
H	2




K3800 /3850 series Installation Dimensions & Tech Data

Length calculation

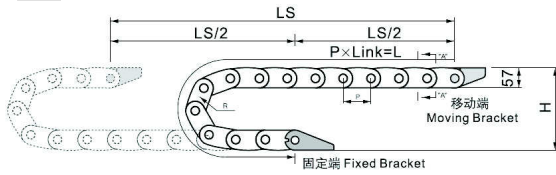


$$L = \frac{LS}{2} + \pi \times R + 224$$



L: Length
 R: bending Radius
 H: Installation Height
 P: Pitch
 224: Safety Length

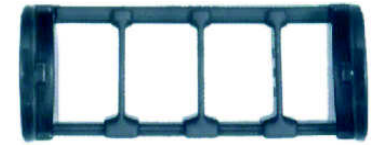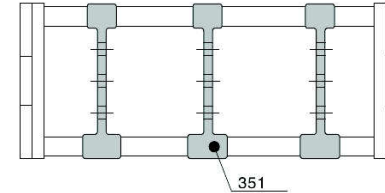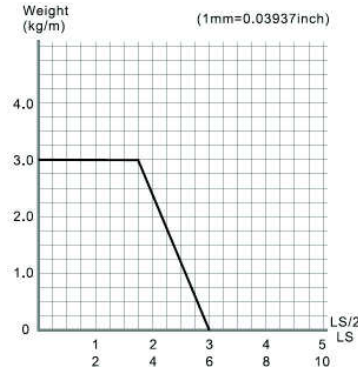

Moving bracket


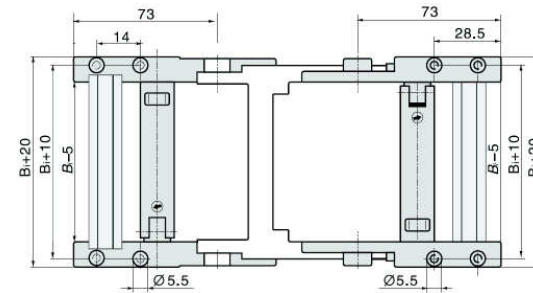


Fixed bracket

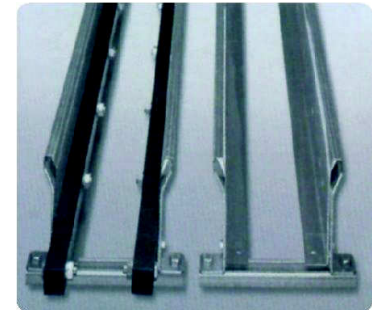



K3800 series can be open by both side

Type	Inner width (mm)	Outer width (mm)	Bending radius(mm)	Pitch (mm)	Weight (kg)
3800.050.□.0	50	77	75 100 125 150 200	56	2.20
3800.075.□.0	75	102	75 100 125 150 200	56	2.40
3800.100.□.0	100	127	75 100 125 150 200	56	2.60
3800.125.□.0	125	152	75 100 125 150 200	56	2.70
3800.150.□.0	150	177	75 100 125 150 200	56	2.90
3800.175.□.0	175	202	75 100 125 150 200	56	3.00
3800.200.□.0	200	227	75 100 125 150 200	56	3.10
3800.250.□.0	250	277	75 100 125 150 200	56	3.20



K3850 series can be open by both side


Type	Inner width (mm)	Outer width (mm)	Bending radius(mm)	Pitch (mm)	Weight (kg)
3850.050.□.0	50	77	75 100 125 150 200	56	2.40
3850.075.□.0	75	102	75 100 125 150 200	56	2.60
3850.100.□.0	100	127	75 100 125 150 200	56	2.80
3850.125.□.0	125	152	75 100 125 150 200	56	3.00

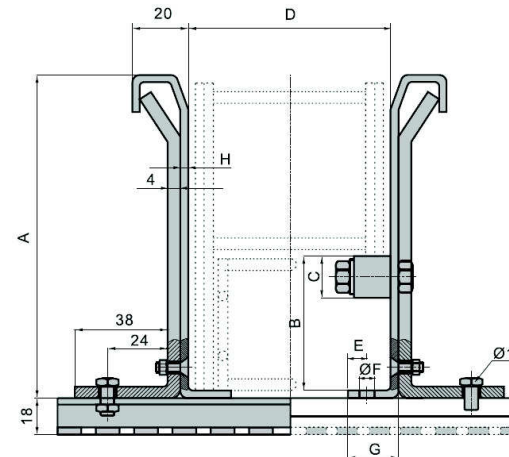

Cable tray without slide strip	3
Cable tray with slide strip	3
A	130
B	64
C	30
D	*
E	15
F	9
G	35
H	2


K4500 /4550 series Installation Dimensions & Tech Data

Length calculation

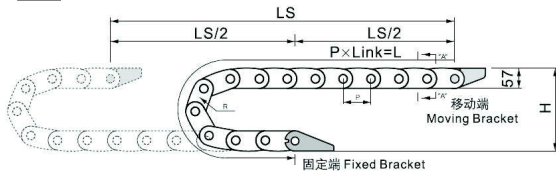



$$L = \frac{LS}{2} + \pi \times R + 268$$

L: Length
R: bending Radius
H: Installation Height
P: Pitch
268: Safety Length

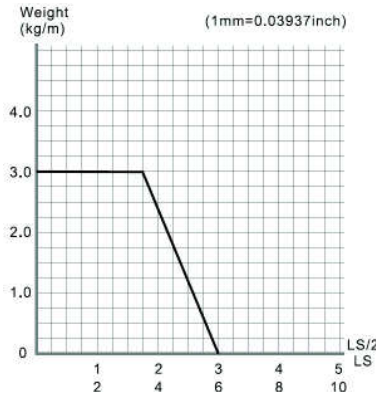



K4500 series can be open by both side

Type	Inner width (mm)	Outer width (mm)	Bending radius(mm)	Pitch (mm)	Weight (kg)
4500.050.□.0	50	75	100 125 150 200	67	2.40
4500.075.□.0	75	100	100 125 150 200	67	2.60
4500.100.□.0	100	125	100 125 150 200	67	2.90
4500.125.□.0	125	150	100 125 150 200	67	3.30
4500.150.□.0	150	175	100 125 150 200	67	3.55
4500.175.□.0	175	200	100 125 150 200	67	3.70
4500.200.□.0	200	225	100 125 150 200	67	3.90
4500.250.□.0	250	275	100 125 150 200	67	4.00





K4550 series can be open by both side




Type	Inner width (mm)	Outer width (mm)	Bending radius(mm)	Pitch (mm)	Weight (kg)
4550.075.□.0	75	100	100 125 150 200	67	2.80
4550.100.□.0	100	125	100 125 150 200	67	3.20
4550.125.□.0	125	150	100 125 150 200	67	3.40

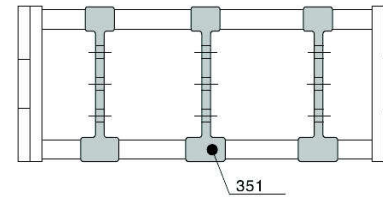

Fixed bracket

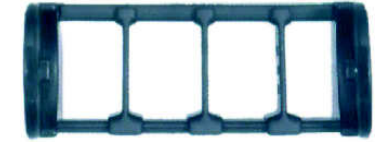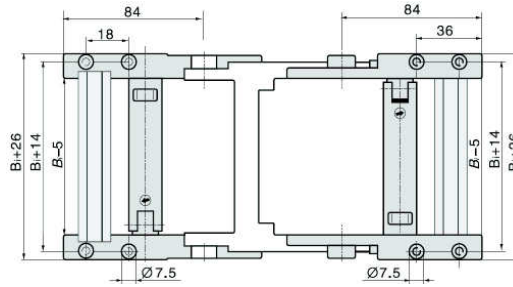

Moving bracket

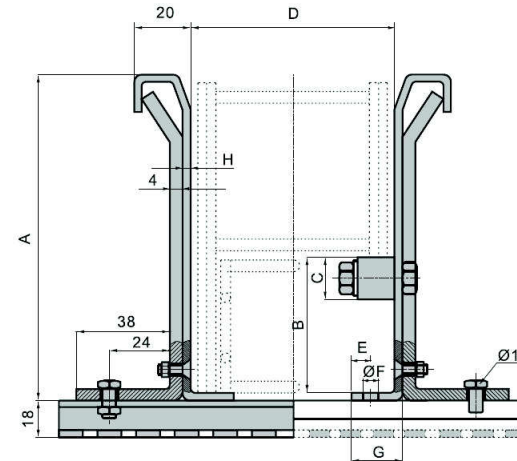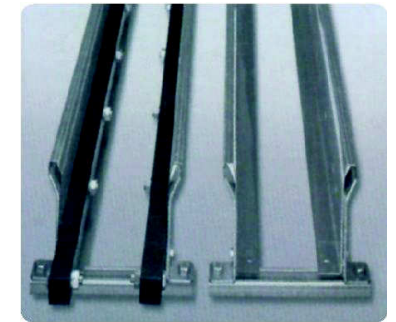

Cable tray without slide strip	3
Cable tray with slide strip	3
A	130
B	64
C	30
D	*
E	15
F	9
G	35
H	2